



TCW IBBS system with Lycoming Electronic Ignition or Surefly Ignition

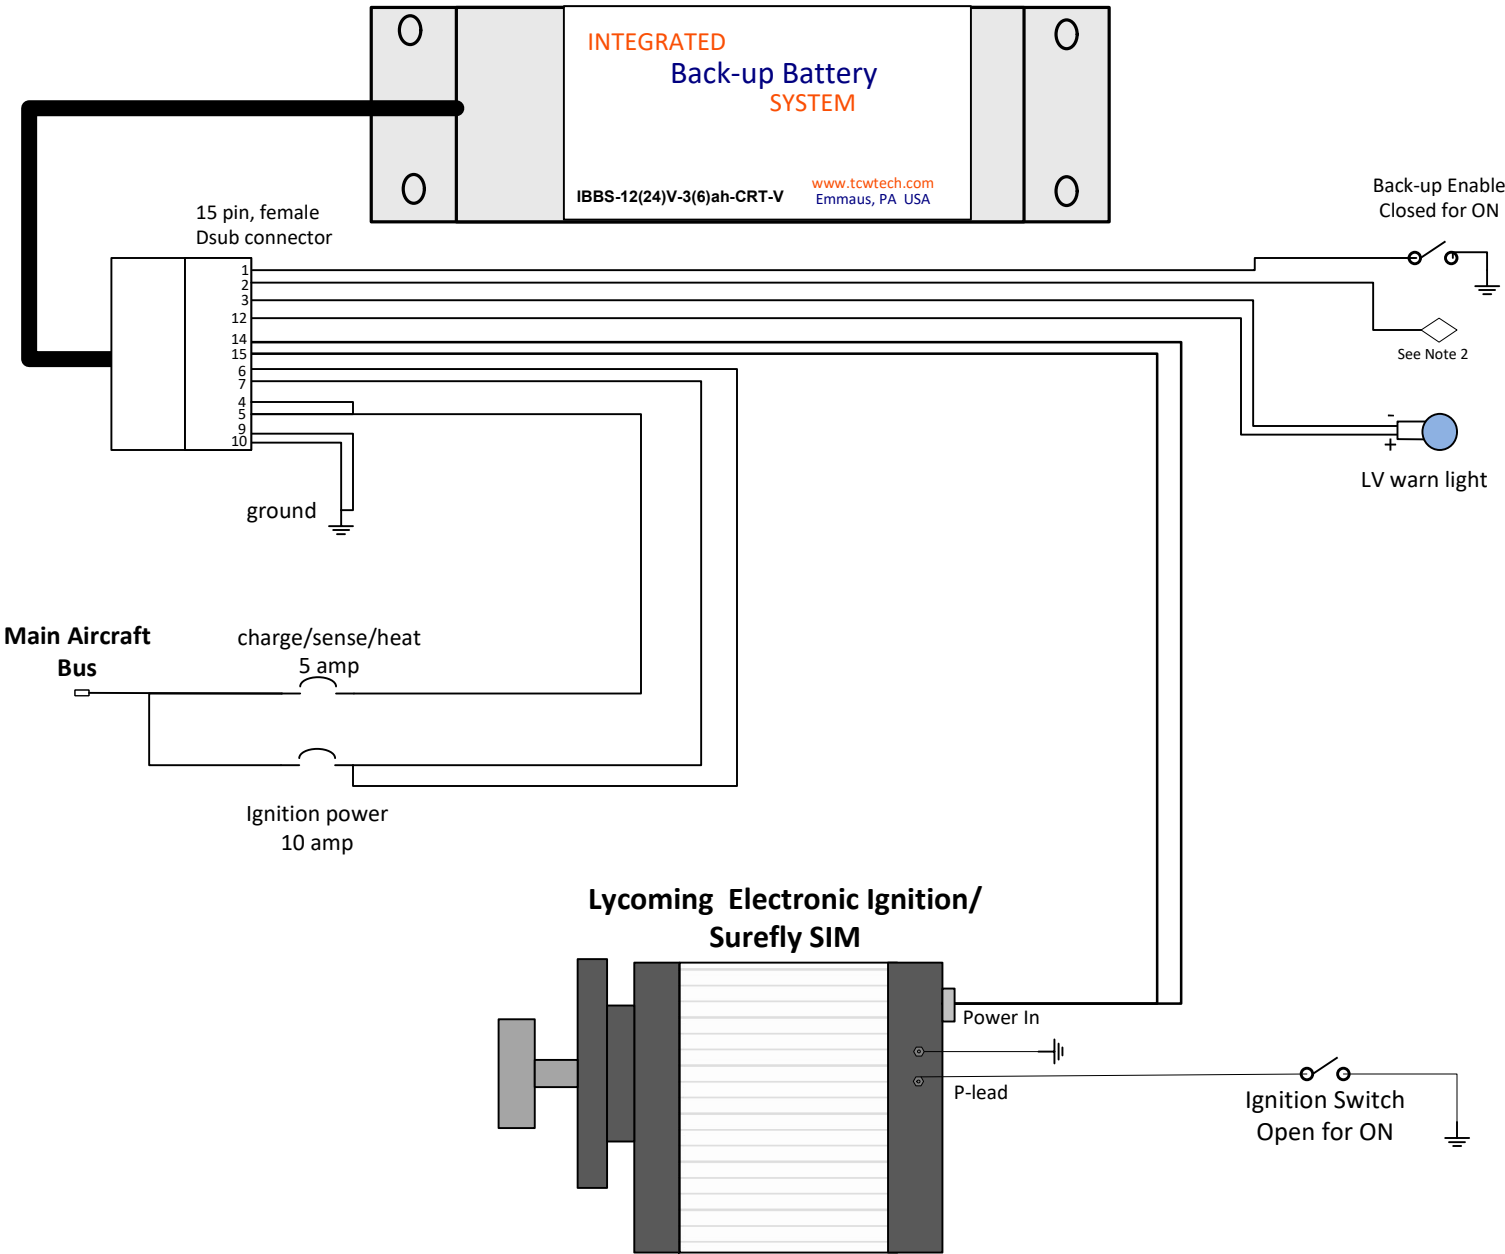

15 pin Male Dsub on unit

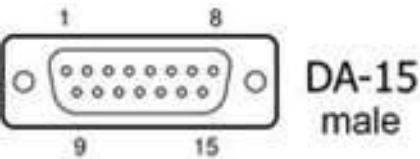

NOTE:  
1) Utilize dual inputs, grounds and outputs for redundancy and current capability.  
2) Volt meter connection for test or panel mount volt meter, >100k ohm impedance required. Do not use a meter powered from this connection.

Pin #	Function	Pin #	Function
1	Electronic ignition ON/OFF	9	Ground
2	Batt-info, volt meter	10	Ground
3	Low Volt Warn -		
4	PWR + in, heater, 12v only	12	Low Volt Warn power +
5	PWR + in, charge, sensing	14	Output
6	Pwr +, pass-thru input	15	Output
7	Pwr +, pass-thru input		